


24-40 (oil-lubricated)

Voltage	V	200	200	230	230	3x200	3x200	3x208	3x400 ²⁾	3x440 ²⁾		
Frequency	Hz	50	60	50	60	50	60	60	50	60		
Motor	HP	1.84	1.84	1.84	1.84	1.84	1.84	1.84	1.84	1.84		
	kW	1.35	1.35	1.35	1.35	1.35	1.35	1.35	1.35	1.35		
Displacement	l/min	200	240	200	240	200	240	240	200	240		
	CFM	7.06	8.48	7.06	8.48	7.06	8.48	8.48	7.06	8.48		
FAD @ 8 bar	l/min	128	148	128	148	128	148	148	128	148		
	CFM	4.52	5.23	4.52	5.23	4.52	5.23	5.23	4.52	5.23		
Max. pressure ¹⁾	bar	8	8	8	8	8	8	8	8	8		
	psi	120	120	120	120	120	120	120	120	120		
Max. current	A	11.6	11.6	11.6	11.6	8.7	8.7	8.7	5.8	5.8		
Tank size	litres	40	40	40	40	40	40	40	40	40		
	gallon	10.6	10.6	10.6	10.6	10.6	10.6	10.6	10.6	10.6		
Weight	kg	84	84	84	84	84	84	84	84	84		
	lbs	185	185	185	185	185	185	185	185	185		
Noise level	dB(A)/1m	56	56	56	56	56	56	56	56	56		
Thermal protection		Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes		
Duty cycle		50%	50%	50%	50%	50%	50%	50%	50%	50%		

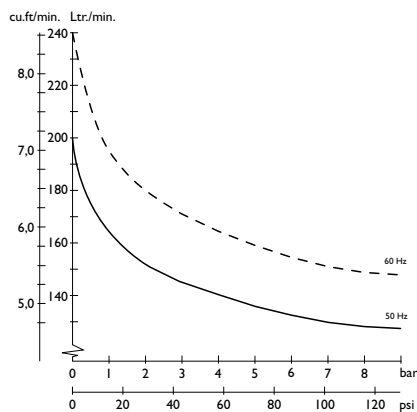

Dimensions (l x w x h)
590 x 540 x 610 mm / 23²/₈ x 21²/₈ x 24 inch

- ¹⁾ Higher pressure available upon request
²⁾ Neutral is required

Technical modifications reserved

JUN-AIR®

E-mail: info@jun-air.dk
Internet: www.jun-air.com

