


OFI 20 I-25MD2 (oil-less)

| | | | | | | | | | | | | | |
|----------------------------|--------|------|------|------|------|------|------|------|------|--|--|--|--|
| Voltage | V | 100 | 100 | 120 | 200 | 200 | 208 | 230 | 230 | | | | |
| Frequency | Hz | 50 | 60 | 60 | 50 | 60 | 60 | 50 | 60 | | | | |
| Motor | HP | 1.22 | 1.22 | 1.22 | 1.22 | 1.22 | 1.22 | 1.22 | 1.22 | | | | |
| | kW | 0.90 | 0.90 | 0.90 | 0.90 | 0.90 | 0.90 | 0.90 | 0.90 | | | | |
| Displacement | l/min | 146 | 170 | 170 | 146 | 170 | 170 | 146 | 170 | | | | |
| | CFM | 5.16 | 6.00 | 6.00 | 5.16 | 6.00 | 6.00 | 5.16 | 6.00 | | | | |
| FAD @ 8 bar/120 psi | l/min | 65 | 75 | 75 | 65 | 75 | 75 | 65 | 75 | | | | |
| | CFM | 2.30 | 2.65 | 2.65 | 2.30 | 2.65 | 2.65 | 2.30 | 2.65 | | | | |
| Max pressure ¹⁾ | bar | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | | | | |
| | psi | 120 | 120 | 120 | 120 | 120 | 120 | 120 | 120 | | | | |
| Max. current | A | 13.0 | 13.0 | 11.0 | 6.5 | 6.5 | 6.5 | 6.2 | 5.8 | | | | |
| Tank size | litres | 25 | 25 | 25 | 25 | 25 | 25 | 25 | 25 | | | | |
| | gallon | 6.6 | 6.6 | 6.6 | 6.6 | 6.6 | 6.6 | 6.6 | 6.6 | | | | |
| Weight | kg | 98 | 98 | 98 | 98 | 98 | 98 | 98 | 98 | | | | |
| | lbs | 216 | 216 | 216 | 216 | 216 | 216 | 216 | 216 | | | | |
| Noise level | db(A) | 58 | 61 | 61 | 58 | 61 | 61 | 58 | 61 | | | | |
| Thermal protection | | Yes | Yes | Yes | Yes | Yes | Yes | Yes | Yes | | | | |
| Duty cycle | | 100% | 100% | 100% | 100% | 100% | 100% | 100% | 100% | | | | |

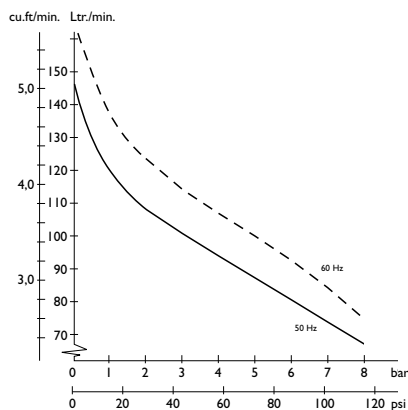

Dimensions (l x w x h)
720 x 460 x 860 mm / 28.0 x 18.0 x 34.0 inch

- ¹⁾ FAD is reduced by 18-20% on units with dryer.
Minimum pressure required to operate: 6 bar/90 psi
²⁾ Higher pressure available upon request

Technical modifications reserved

JUN-AIR 

IDEX
IDEX CORPORATION

E-mail: info@jun-air.dk
Internet: www.jun-air.com

